

SF-SW1208HIPOE-GF-120

Safire Switch Hi-PoE

8 PoE ports + 2 SFP + 2 RJ45


Gigabit port speed 10/100/1000Mbps

6 PoE+ Ports 30W + 2 Hi-PoE Ports

60W

PoE Watchdog

Up to 120W Total PoE Power

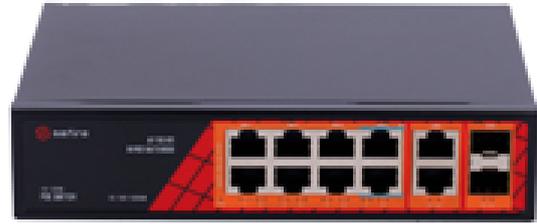

Desktop Switch

6 PoE+ ports 30W RJ45 10/100/1000 Mbps

2 Hi-PoE+ ports 60W 802.3bt 10/100/1000Mbps + 2 Uplink SFP ports 10/100/1000Mbps

2 Uplink ports RJ45

Supports PoE power supply up to 120W in total for all ports

AI Watchdog

Specifications

Interface	8 PoE ports + 2 Uplink SFP + 2 Uplink RJ45
Port speed RJ45	8x 10/100/1000Mbps + 2x 10/100/1000Mbps + 2x 10/100/1000Mbps
PoE features	Up to 120W in total for all ports Ports 1-6 PoE+ Up to 30W 802.3af/at Port 7-8 Hi-PoE Up to 60W 802.3af/at/bt
Transmission distance	130 meters
Bandwidth	24Gbps
MAC Table	8K
Latency	10 to 100MBps < 16?s (using 64 packet size byte)
AI PoE	PoE Watchdog Ports 1-8 - Automatic restart of the power supply to a PoE port when a possible failure is detected.
Power	Front Take 90~240V
Protections	6KV against Rays 8KV ESD Protection
Operating temperature	-30° C ~ 60° C
Dimensions	187 x 139 x 43 mm
Weight	1Kg